

W LUM FARM




**LUMENIA
INDUSTRIAL**

With its high grade of protection against dust, contamination and water permeation, W LUM LED light is a perfect solution for illuminating spaces with dusty and humid environments. It is specially developed for farming and industry and chemically aggressive environments



	W LUM
System efficacy	Up to 154 lm/W
Supply voltage	220-240 VAC
Power	43 W
Luminous flux	Up to 6,600 lm
Body type	W LUM3
Weight	2.13 kg
Lifetime L80B10	> 50,000 h
CCT	4,000 K
CRI	≥ 80
Ingress protection	IP 65
Operating temperature	-20 °C to +35 °C
Electrical / Appliance class	Class I
Remote control options	DALI (Optional)
Housing material	PMMA
Mounting	Pendant or surface mounting
Warranty	5 years
Certificates	CE

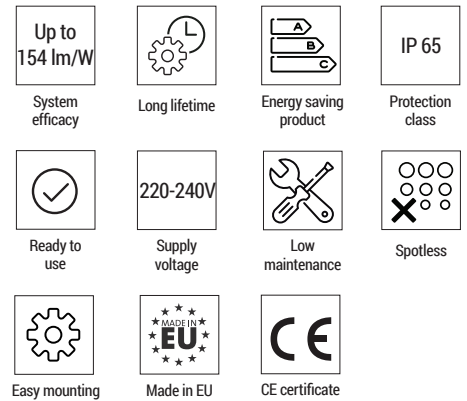

MAIN FEATURES

High grade of protection IP65
High system efficacy
Quick access to connectors


APPLICATIONS

Farming
Chemically aggressive environments

ACCESSORIES


Mounting bracket

DIMENSIONS




SIZES	W LUM 3
A	1577
B	1000
KG	2,2

*All dimensions are in mm.

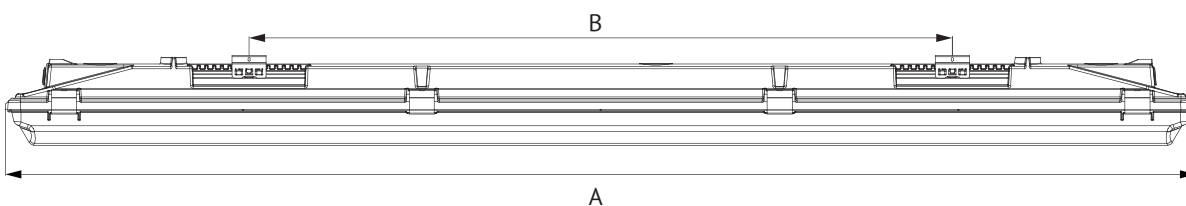

OPTIC

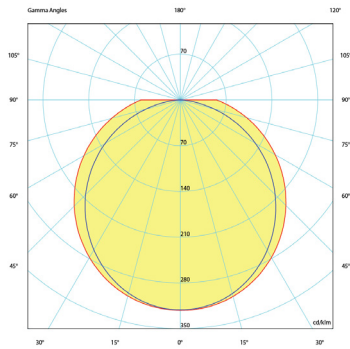

Angular distribution of luminance.


PRODUCT VARIATIONS

Code	Power [W]	Luminous flux [lm]*	Efficacy [lm/W]	Body type
WLUM FARM 45.1500	43	Up to 6,600	Up to 154	W LUM 3

*Luminous flux is valid for CCT 4000 K

The latest validated data is available at www.lumenia.com.

W LUM MOUNTING ACCESSORY

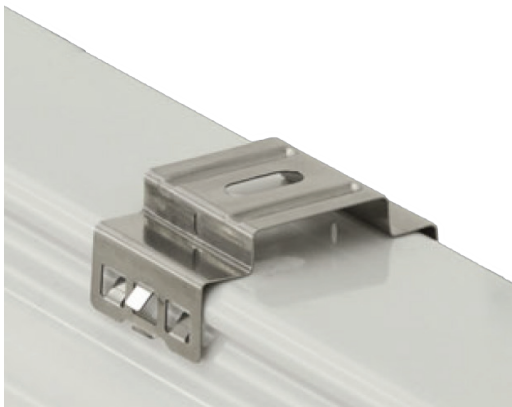

Mounting on the wall or ceiling



Pendant mounting

NOTES
